

September 14, 1999

The COMMISSIONER OF PATENTS  
Washington, D.C. 20231


Transmitted herewith for filing is the patent application of :  
INVENTOR: BENTON FREDERICK BAUGH, Ph.D., P.E.  
FOR: SUBSEA PIPELINE BLOCKAGE REMEDIATION METHOD  
SERIAL NO: TBA  
FILED: TBA  
EXAMINER: TBA

Enclosed are:

- (x) Patent application including Title, Field of the Invention, Background of the Invention, Summary of the Invention, Brief Description of the Drawings, Detailed Description of the Preferred Embodiment, Patent Claims, and Abstract,
- (x) Declaration for Patent Application
- (x) 13 Sheets of formal drawings
- ( ) Sheets of informal drawings,
- (x) Verified Statement Claiming Small Entity Status
- (x) Information Disclosure Statement
- ( ) A certified copy of the application,
- ( ) An assignment of the invention to:
- (x) A check to cover the filing fee, calculated as follows:

Basic filing fee, Small Entity					\$395.00
FOR	NUMBER FILED	(LESS)	NUMBER EXTRA	RATE	EXTRA COST
TOTAL CLAIMS	39	20	19	\$11.00	\$209.00
INDEPENDENT CLAIMS	5	3	2	\$41.00	\$82.00
TOTAL FILING FEE					\$686.00

We appreciate your assistance in this matter.

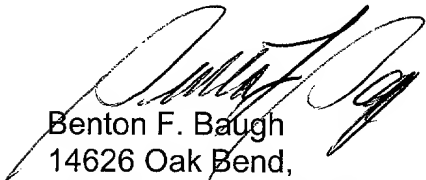
  
Benton F. Baugh  
14626 Oak Bend,  
Houston, Texas 77079  
(713) 497-6042

**VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS  
37 CFR 1.9 (f) AND 1.27 (b) - INDEPENDENT INVENTOR**

I, Benton F. Baugh, hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41.(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention **SUBSEA PIPELINE BLOCKAGE REMEDIATION METHOD** described in the specification filed herewith. I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28 (b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.,

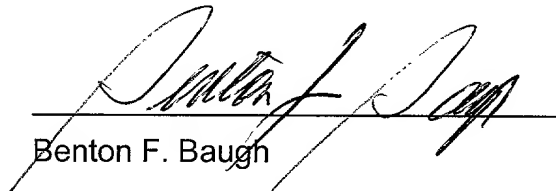  
Benton F. Baugh

  
Date

6602260\* 92286660

September 14, 1999

The COMMISSIONER OF PATENTS  
Washington, D.C. 20231

Transmitted herewith for filing is the patent application of :  
INVENTOR: BENTON FREDERICK BAUGH, Ph.D., P.E.  
FOR: SUBSEA PIPELINE BLOCKAGE REMEDIATION METHOD  
SERIAL NO: TBA  
FILED: TBA  
EXAMINER: TBA

Enclosed are:

- (x) Patent application including Title, Field of the Invention, Background of the Invention, Summary of the Invention, Brief Description of the Drawings, Detailed Description of the Preferred Embodiment, Patent Claims, and Abstract,
- (x) Declaration for Patent Application
- (x) 13 Sheets of formal drawings
- ( ) Sheets of informal drawings,
- (x) Verified Statement Claiming Small Entity Status
- (x) Information Disclosure Statement
- ( ) A certified copy of the application,
- ( ) An assignment of the invention to:
- (x) A check to cover the filing fee, calculated as follows:

Basic filing fee, Small Entity					\$395.00
FOR	NUMBER FILED	(LESS)	NUMBER EXTRA	RATE	EXTRA COST
TOTAL CLAIMS	39	20	19	\$11.00	\$209.00
INDEPENDENT CLAIMS	5	3	2	\$41.00	\$82.00
TOTAL FILING FEE					\$686.00

We appreciate your assistance in this matter.

Benton F. Baugh  
14626 Oak Bend,  
Houston, Texas 77079  
(713) 497-6042

## APPLICATION FOR PATENT

INVENTOR: BENTON F. BAUGH

TITLE: SUBSEA PIPELINE BLOCKAGE REMEDIATION METHOD

## BACKGROUND OF THE INVENTION

The field of this invention is that of removing blockages in remote subsea pipeline, typically from subsea gas well installations.

Hydrates are a porous solid which is formed primarily of water with a mixture of gases. It is effectively similar to ice. There is a tendency for hydrates to form in the pipelines departing from a subsea gas well, especially on well startup.

The temperature of seawater at depths will often approach 32° F., with the temperature in non-flowing pipelines being the same. When a subsea pipeline valve is opened, the gas expansion can cause substantial additional cooling. In these cold and high pressure conditions, hydrates of the gas and water can quickly form.

Frequently when the hydrate forms, it forms a blockage, the blockage will be somewhat porous. At that time, a high pressure will exist on the upstream side and a lower pressure will exist on the downstream side of the blockaged. This means that additional gas will move thru the hydrate and expand and therefore cool as it does. This means that not only can the expansion of this gas keep the formed hydrate cool, but can literally continue to grow additional hydrate blockage.

It is difficult to tell where the hydrates are actually located in deepwater pipelines, especially when the pipelines are buried.

Hydrates formed like this can last for weeks or months, with a substantial loss of gas flow and therefore revenue to the owner of the pipelines and subsea wells.

Paraffins can form blockages in pipelines by building up on the inner diameter of the cold pipelines as relatively warm oil circulates out of an oil well and cools as it flows down a subsea pipeline. As the layer of paraffin builds up on the subsea pipeline inner diameter, the inner diameter of the paraffin becomes smaller and smaller. Ultimately a pigging device intended to clean the paraffin will cause the paraffin to separate from the inner wall of the pipeline and become a plug. In some cases the paraffin will release from the subsea pipeline inner diameter without a pig and cause a blockage. In either case, if the pressure in the pipeline is enough to move the plug along the pipeline, it will continue to collect additional paraffin as it moves until the length of the blockage cannot be moved by the available pressure.

Some attempts have been made to enter the end of the pipeline with a somewhat flexible string of coiled tubing to get to the blockage and wash it out. This is an expensive operation, and in some cases the blockage can be 10 to 20 miles away.

Removal by use of coiled tubings can be further complicated if the pipeline has bends in it, making passage of the coiled tubing difficult if not impossible.

## SUMMARY OF THE INVENTION

The object of this invention is to provide a system which will approach a subsea pipeline and remove hydrate and/or paraffin blockages from within the pipeline.

A second object of the present invention is to provide a method of removing the hydrate or paraffin without requiring that the pressure integrity of the pipeline be compromised.

A third object of the present invention is to provide for recirculation of seawater to

allow the heat not absorbed into the pipeline to increase the inlet temperature to the seawater heating means – thereby increasing the outlet temperature of the seawater.

Another object of the present invention is to provide a means for applying heat to the outer surface of a subsea pipeline without uncovering the pipeline to minimize the disturbance to the pipeline.

Another object of the present invention is to provide means for applying heat to the outer surface of a subsea pipeline without uncovering the pipeline so that the insulating effects of the covering will retain the heat in the pipeline.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure no. 1 is a section thru the pipeline and the thermal operating module showing the circulation thru the circulation chamber.

Figure no. 2 is a larger section of the view of figure no. 1 including a trench dug to uncover the pipeline and the remotely operated vehicle (ROV).

Figure no. 3 is a similar section thru the system, but showing wheels which might engage the exterior of the pipeline to drive the thermal operating module along the pipeline.

Figure no. 4 is a partial section of the system taken axially along the pipeline showing a spatial relationship between the driving wheels and a heating chamber utilizing electric resistance heating of the seawater used for the heating.

Figure no. 5 is a similar figure to figure no. 4, but showing the heat being generated by a pressure drop across an orifice rather than electric resistance heating.

Figure no. 6. shows an alternate embodiment of this invention with the circulation

chamber being disposed a distance away from the main portion of the system to allow the circulation chamber to follow the pipeline under the mudline without uncovering the pipeline.

Figure no. 7. shows the rollers of the alternate embodiment and their method of engaging the pipeline.

Figure no. 8 shows a side view of the thermal operating module of the alternate embodiment with the circulation chamber spaced a distance away from the upper section by a pair of legs.

Figure no. 9 is a section thru one of the legs of figure no. 8.

Figure no. 10 is a view of the alternate embodiment engaging the subsea pipeline below the mudline.

Figure no. 11 is a section thru the alternate embodiment showing the heated seawater flowing down the rear leg, into an axial tube, and across the upper surface of the pipeline.

Figure no. 12 is a section thru the alternate embodiment showing the heated seawater flowing across the upper surface of the pipeline, into an axial tube, and up the front leg.

Figure no. 13 is a partial section thru the alternate embodiment showing the full circulation of the heated water down the rear leg, along the circulation chamber and back up the front leg.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to figure no. 1, a subsea pipeline 10 has a blockage indicated at 12.

The subsea pipeline 10 is setting on the seafloor 14 and is covered by seawater 16 which may be as cold as 32° F. Arrows 18 indicate the flowing of heated seawater across the upper portion 20 of the subsea pipeline 10 for the purpose of disassociating the pipeline blockage 12. The disassociation may be melting a hydrate, melting a paraffin blockage, or softening a paraffin blockage to the point that it will flow.

Two tubes 22 and 24 run parallel to the subsea pipeline and have a plurality of holes 26 and 28 which direct heated seawater into the circulation chamber 30 or out of the circulation chamber 30 respectively. Line 32 feeds heated seawater into tube 22 and return line 34 draws the seawater out of tube 24. The return line 34 leads to pump 36 and then to heating element 38 and back to tube 32. The heated seawater which is introduced into the combustion chamber by tube 22 is somewhat cooled by flowing across the upper portion 20 of subsea pipeline 10 before it enters tube 24 to return thru the pump and back into the heating element 38. As the returning seawater is only partially cooled, the inlet to the heating element 38 is higher, so the output seawater from the heating element will be progressively higher each circulation until a temperature is reached in which the heat losses thru the insulation will equal the heat input and so a form of steady state will be achieved.

Resilient flap type seals 40 are placed around the perimeter of the circulation chamber 30 to restrict the mixture of the seawater 42 within the circulation chamber with the seawater 44 outside the circulation chamber.

Most conventional ROVs have a minimum of 100 horsepower of electricity which can almost all be converted into heat thru a resistance heater, so it can be readily seen that if the same seawater is circulated with only minimal leakage, it can be quickly



brought to a high temperature.

Referring now to figure no. 2, the apparatus of figure no. 1 is shown below an ROV 50 and operating in an area of the subsea pipeline 10 which has been uncovered in a ditch form 52. By uncovering only the top portion of the pipeline, the lower portion of the seafloor is left intact to support the pipeline. The thermal operating module is generally referred to as 55.

Referring now to figure no. 3, an alternate section through the thermal operating module 55 showing rollers 60 and 61 mounted on motors 62 and 63 and pivoted about pin 64. Cylinders 66 and 67 will move to push the rollers 60 and 61 against the pipeline 10 and the motors 62 and 63 will turn the rollers 60 and 61 to drive the thermal operating module along the pipeline.

Referring now to figure no. 4, rollers 60, 61, 70, and 71 are shown positioned to move the thermal operating module 55 along the pipeline 10. The speed along the pipeline would be calculated to allow the hydrates and/or paraffin in the pipeline to melt during the heating cycle. Umbilical 74 typically provides 100 to 150 horsepower of electricity to operate the ROV, but in the case of the thermal operating module will use a majority of this electrical horsepower to generate heat.

Referring now to figure no. 5, an alternate method of converting energy into heat is illustrated. Rather than providing electrical resistance heating, the energy is directed toward the pump 80 which is a high pressure pump (i.e. 10,000 p.s.i.) rather than a circulating pump like 36 (i.e. 15 p.s.i.). The high pressure output of pump 80 is directed across a pressure reducing means such as an orifice 90 to drop the pressure to a low pressure (i.e. 15 p.s.i.). In dropping the pressure in this "inefficient" manner, the

horsepower required to operate the pump is lost into heat, which is our goal. In some situations it may be convenient to run a hose or pipe from the surface to simply provide high pressure fluid for heat generation at the subsea location in a similar manner. Using pressure to transport energy to a subsea location is practical, whereas attempting to directly pump high temperature fluid to a subsea location will result in substantial thermal energy losses.

Alternate methods of generating heat at the subsea location adjacent to the pipeline such as chemical reactions can also be used to provide the heat necessary for the task of pipeline blockage remediation.

Referring now to figure no. 6, an embodiment is illustrated which can eliminate the requirement for uncovering and then recovering the subsea pipelines. Both uncovering and recovering subsea pipelines are expensive tasks. It is inherently true if the sea bottom is soft enough for the pipeline to be buried into it, it is relatively soft. Figure no. 6 illustrates the circulation chamber 30 being streamlined and mounted on streamlined legs such that they will simply plow through the soft seafloor bottom. Leg 100 extends down from the heat generation section 101 and supports the circulation chamber 30 and a pair of rollers 102 and 104. Operation of the rollers will be discussed in the next figure. Drive shafts 106 and 108 go up to motors 110 and 112 (not seen) which are mounted on cylinders 114 and 116 (not seen).

Referring now to figure no. 7, roller 104 is supported on axle 120 which pivots about pivot 122 and extends to universal joint 124 and then upward by shaft 108 to motor 110 (not shown). When shaft 108 is pushed down by cylinder 114 (not shown), the roller 104 pivots away from the central opening 126. When the cylinder 114 pulls up,

the roller 104 is moved toward the central cavity 126 and toward subsea pipeline 10 when subsea pipeline 10 is in the central cavity 126.

Referring now to figure no. 8, a side view of the alternate embodiment is shown illustrating that two stream lined legs 130 and 132 connect the circulation chamber 30 to the heat generation section 101.

Referring now to figure no. 9, a cross section of leg 130 of figure no. 8 is shown illustrating the streamlined shape and the location of drive shafts 106 and 108 and the return line 34.

Referring now to figure no. 10, the circulation chamber 30 along with rollers 102 and 104 are shown engaging the pipeline 10 below the seafloor. Cylinders 114 and 116 are shown retracted to the position in which the rollers 102 and 104 are engaging the pipeline 10.

Referring now to figure no. 11, the rear leg 132 is shown with the heated seawater going down the tube 32 and across the circulation chamber 30 along arrow 140.

Referring now to figure no. 12, the front leg 130 is shown with the somewhat cooled seawater returning back to the pump for recirculation along arrow 141.

Referring now to figure no. 13, a partial section of the alternate embodiment is shown with the full circulation path. The components as discussed in figure no. 6 are shown within the front leg 130, and matching components are shown in the rear leg 132. Both the front leg 130 and the rear leg 132 would have similar streamlined profiles as illustrated in figure no. 9

The foregoing disclosure and description of this invention are illustrative and explanatory thereof, and various changes in the size, shape, and materials as well as

the details of the illustrated construction may be made without departing from the spirit of the invention.

## CLAIMS

1. The method of removing blockages of hydrates, paraffins, or the such like from the inside of a subsea pipeline by the steps of

landing a remotely operated vehicle on said subsea pipeline,

engaging said subsea pipeline with traction means which are powered to control the movement of said remotely operated vehicle along said pipeline,

sealingly engage the outer surface of said subsea pipeline,

flowing seawater over a portion of the outer surface of said subsea pipeline,

heating the seawater which is flowing over the outer surface of said subsea pipeline to a temperature higher than the ambient temperature surrounding said subsea pipeline, and

after said seawater is circulated over said portion of the outer surface of said subsea pipeline, recirculating said seawater back into the circulating pumps, past the means of heating said seawater again, and over the portion of the outer surface of said pipeline again,

such that said hydrates, paraffins or the such like will melt and form liquids and/or gases.

2. The method as claimed in claim 1, whereby the method of heating said seawater is by using an electrical resistance heater.

3. The method as claimed in claim 1, whereby the method of heating said seawater is by providing a differential pressure across a pressure reducing means.

4. The method as claimed in claim 1, whereby the method of heating said seawater is by using mixing of chemicals which produce heat upon mixture.

5. The method as claimed in claim 1, whereby said traction means are rollers which are curved on the outer surface to partially conform the outer surface of said subsea pipeline.

6. The method as claimed in claim 1, whereby the means to sealingly engage the outer surface of said subsea pipeline are resilient flappers.

7. The method of removing hydrates, paraffins or the such like from the inside of a subsea pipeline by repeatedly circulating seawater alternately over a portion of the outer surface of said pipeline and over heating means to cause the hydrates, paraffins, or the such like to melt into liquids and/or gases within said subsea pipeline.

8. The invention of claim 7 wherein said heating means is electric heating.

9. The invention of claim 7 wherein said heating means is flowing said fluid across a pressure reducing means.

10. The invention of claim 7 wherein said heating means is by mixing of chemicals.

11. The invention of claim 7 wherein a circulation chamber is moved along said subsea pipeline while circulating said seawater on said subsea pipeline.

12. The invention of claim 11 wherein resilient seals are provided between said circulation chamber and said subsea pipeline to separate said heated seawater within said circulation chamber from the seawater outside said circulation chamber.

13. The method of removing hydrates, paraffins or the such like from a subsea pipeline by

having a remote vehicle place a circulation chamber adjacent to said pipeline, said circulation chamber having an open side to said pipeline,

repeatedly circulating seawater out of said circulation chamber, through heating

means, back into said circulation chamber, and across a portion of said pipeline,

such that heated seawater will be circulated across said portion of said pipeline to warm said pipeline and heat added to the seawater not transferred to said portion of said pipeline will increase the inlet seawater temperature to the heating means.

14. The invention of claim 13 wherein said hydrates, paraffins, or the such like are melted into liquids or gases to eliminate a blockage.

15. The invention of claim 13 wherein said heating means is electric heating.

16. The invention of claim 13 wherein said heating means is a flowing said seawater across a pressure reducing means.

17. The invention of claim 13 wherein said heating means is mixing of chemicals.

18. The invention of claim 13 wherein a circulation chamber is moved along said subsea pipeline while circulating said heated fluid on said subsea pipeline.

19. The invention of claim 18 wherein resilient seals are provided between said circulation chamber and said pipeline to separate said heated fluid within said circulation chamber from the seawater outside said circulation chamber.

20. The method of removing a blockage from a subsea pipeline comprising converting energy into heat in an intermediate fluid below sea level and adjacent to said subsea pipeline.

21. The invention of claim 20 wherein said blockage is hydrates, paraffins, or the such like.

22. The invention of claim 21 wherein said hydrates, paraffins, or the such like are melted into liquids or gases to eliminate the blockage.

23. The invention of claim 20 wherein said intermediate fluid is seawater.

25. The invention of claim 20 wherein said heat is generated by electric heating.

26. The invention of claim 20 wherein said heat is generated by a flowing said fluid across a pressure reducing means.

27. The invention of claim 20 wherein said heat is generated by mixing of chemicals.

28. The invention of claim 20 wherein a circulation chamber is moved along said subsea pipeline while circulating said heated fluid on said subsea pipeline.

29. The invention of claim 28 wherein resilient seals are provided between said circulation chamber and said pipeline to separate said heated fluid within said circulation chamber from the seawater outside said circulation chamber.

30. The method of removing a blockage from a buried subsea pipeline of placing a circulation chamber adjacent to said buried subsea pipeline and circulating a heated fluid on a portion of the surface of said buried subsea pipeline.

31. The invention of claim 30 wherein said blockage is hydrates, paraffins, or the such like.

32. The invention of claim 31 wherein said hydrates, paraffins, or the such like are melted into liquids or gases to eliminate the blockage.

33. The invention of claim 30 wherein said fluid is seawater.

34. The invention of claim 30 wherein heat is generated near the seafloor to heat said fluid.

35. The invention of claim 34 wherein said heat is generated by electric heating.

36. The invention of claim 34 wherein said heat is generated by a flowing said fluid across a pressure reducing means.



37. The invention of claim 34 wherein said heat is generated by mixing of chemicals.

38. The invention of claim 30 wherein said circulation chamber is moved along said buried subsea pipeline while circulating said heated fluid on said subsea pipeline.

39. The invention of claim 30 wherein resilient seals are provided between said circulation chamber and said pipeline to separate said heated fluid within said circulation chamber from the seawater outside said circulation chamber.

660360" 9/28/66

## ABSTRACT OF THE INVENTION

The method of taking a remotely operated vehicle to the ocean floor to land on and move along a subsea pipeline above or below the seafloor and repeatedly circulate seawater which has been heated electrically, mechanically, or chemically across the outer surface of the pipeline to melt hydrates or paraffins which have formed on the inside of the pipeline.

## INFORMATION DISCLOSURE STATEMENT

Although no formal search has been conducted, the following patents have been located relating to this matter:

None

660360" 9/23/60

This page is trash, please discard

subsea pipeline 10  
seafloor 14  
seawater 16  
Arrows 18  
upper portion 20  
Two tubes 22 and 24  
    plurality of holes 26 and 28  
circulation chamber 30  
    Line 32  
    return line 34  
pump 36  
heating element 38  
Resilient flap type seals 40  
seawater 42 within the circulation chamber  
seawater 44 outside the circulation chamber.  
ROV 50  
ditch form 52  
thermal operating module is generally referred to as 55.  
rollers 60 and 61  
motors 62 and 63  
pin 64  
Cylinders 66 and 67  
rollers 60, 61, 70, and 71  
Umbilical 74  
pump 80  
orifice 90  
Leg 100  
heat generation section 101  
pair of rollers 102 and 104  
    Drive shafts 106 and 108  
motors 110 and 112  
cylinders 114 and 116  
axle120  
pivot 122  
    universal joint 124  
central opening 126  
two stream lined legs 130 and 132  
arrow 140.

Note: This application is available in Word format by e-mail if desired.

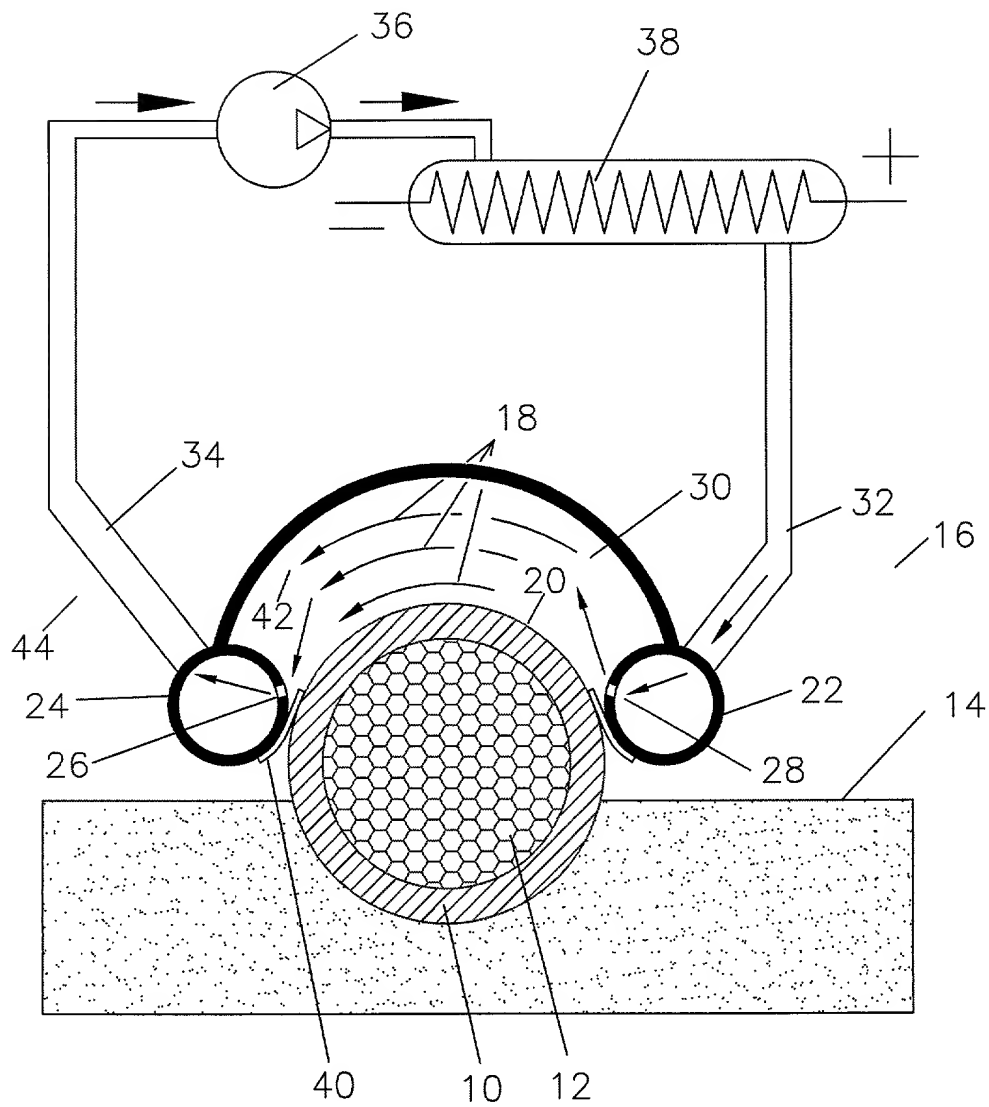


FIG. 1

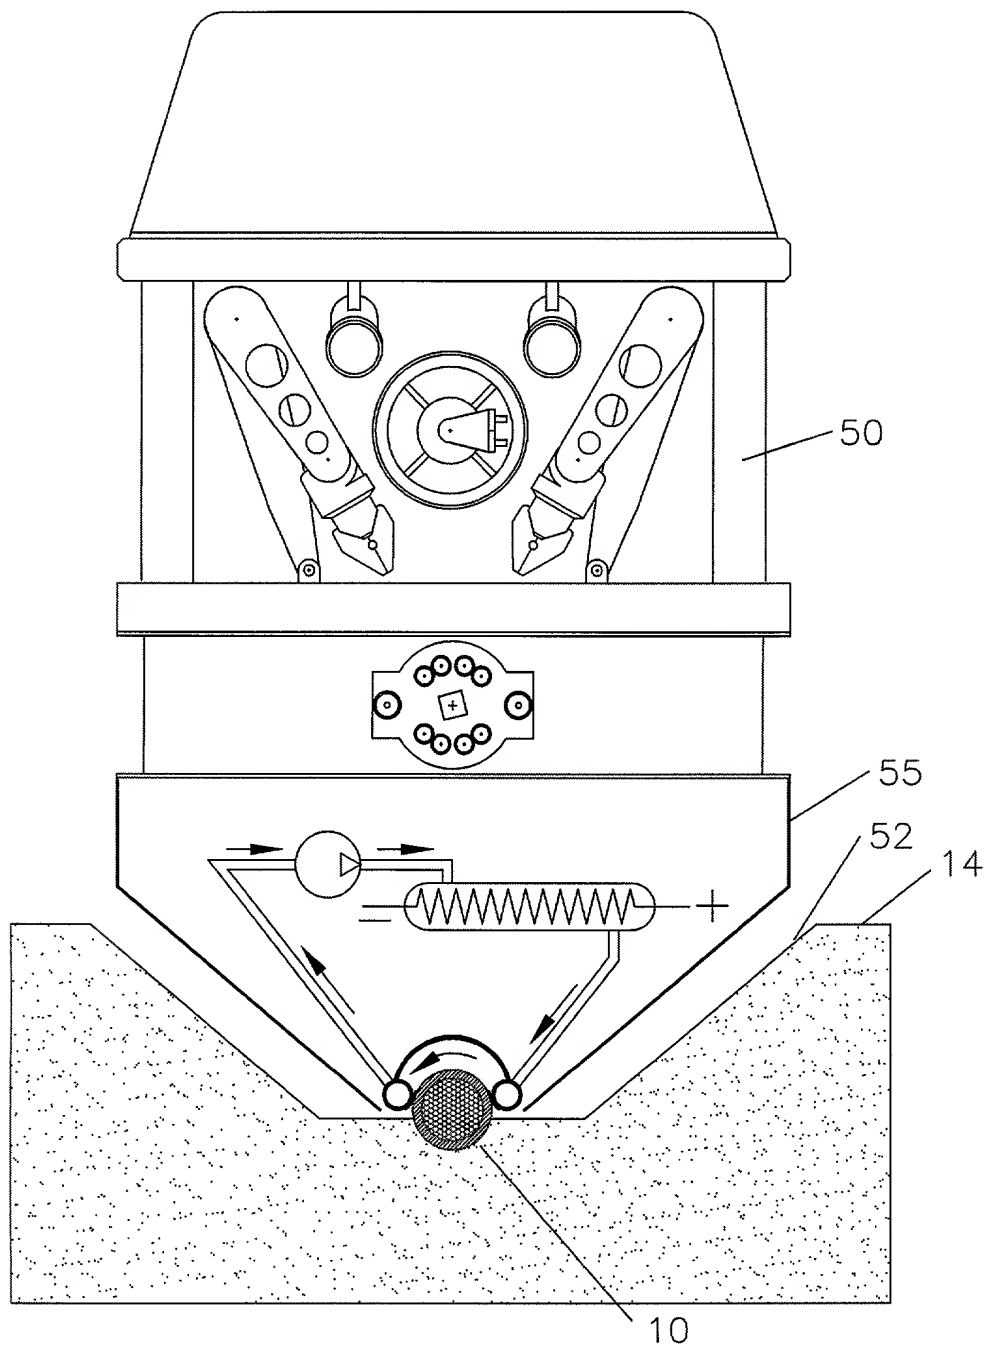


FIG. 2

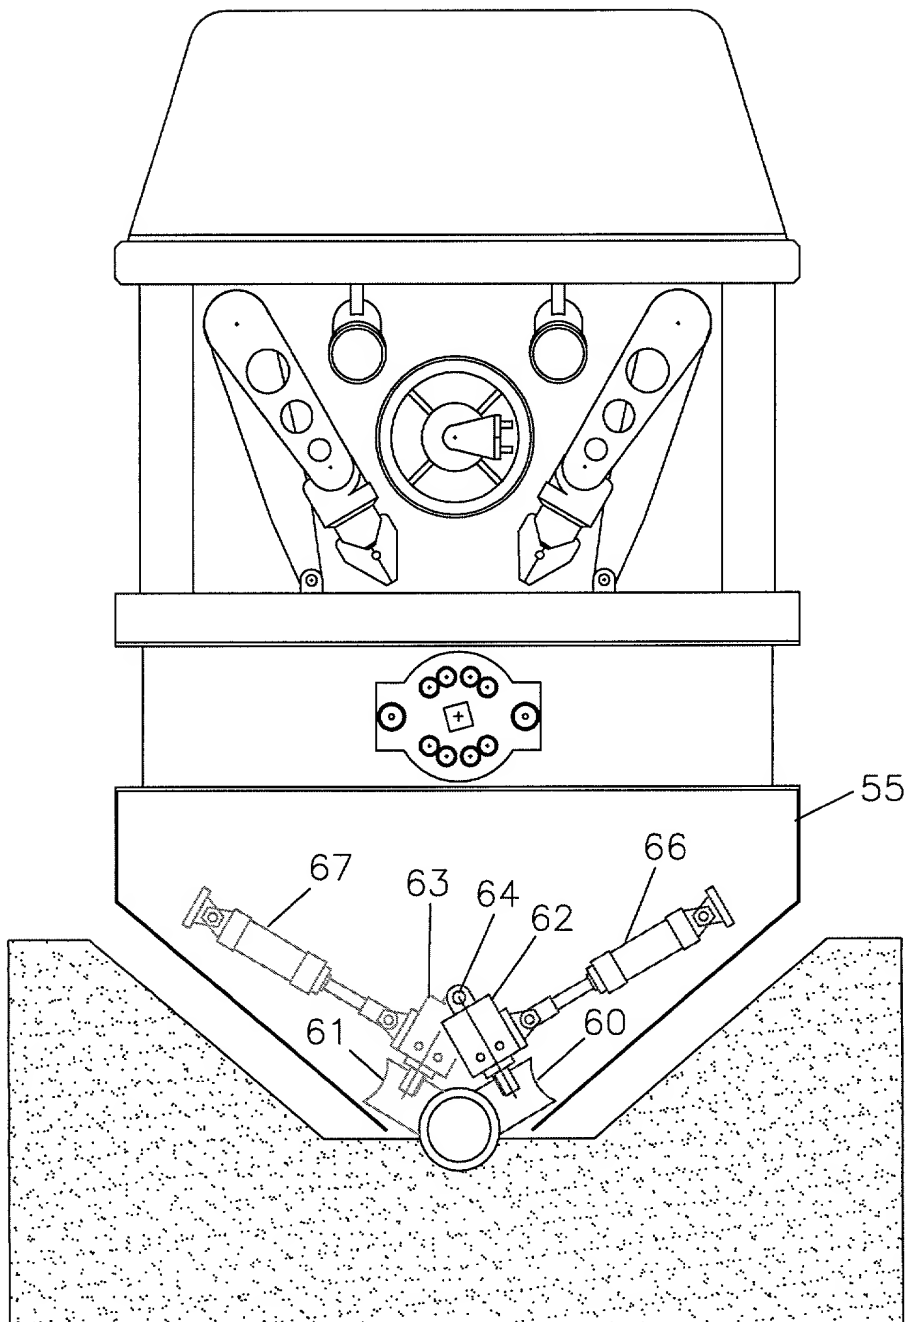


FIG. 3

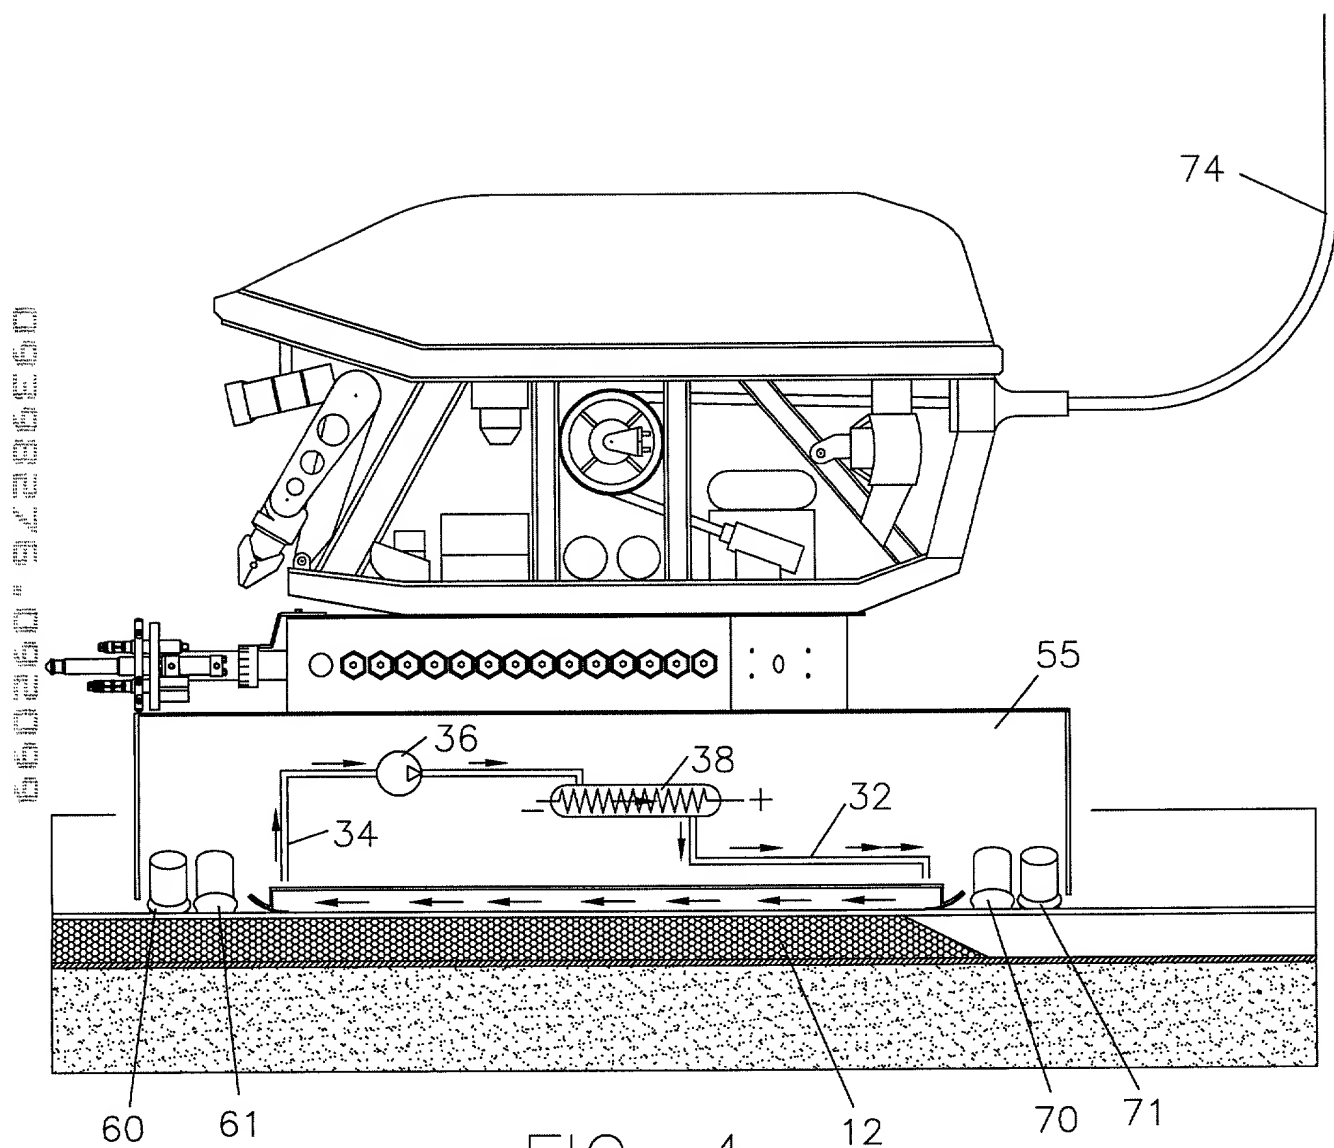


FIG. 4



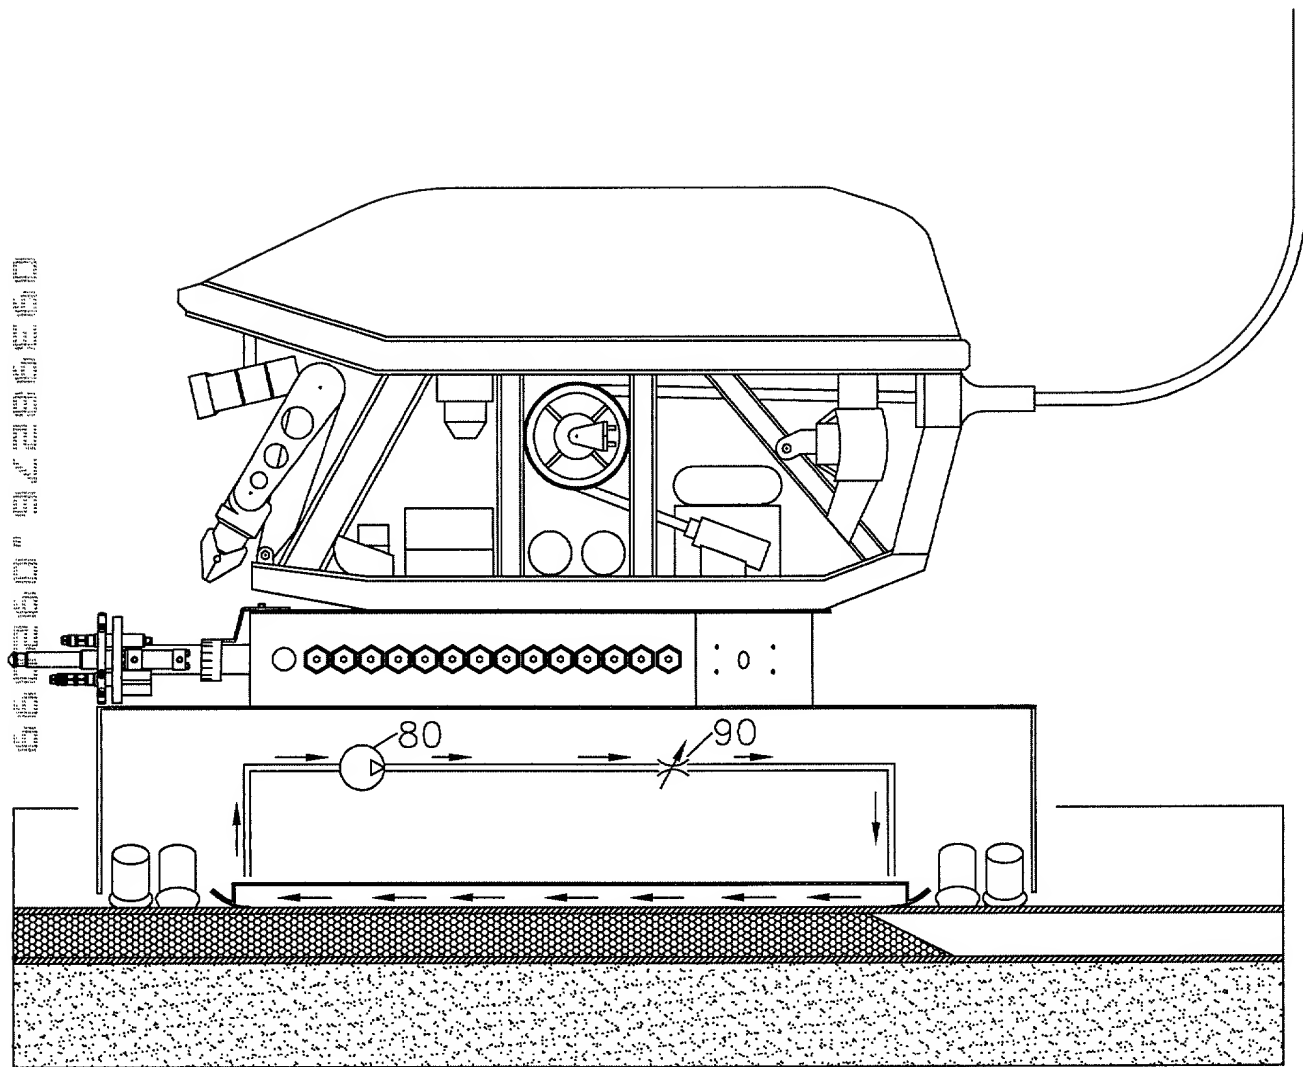


FIG. 5

660260" 9/23/65

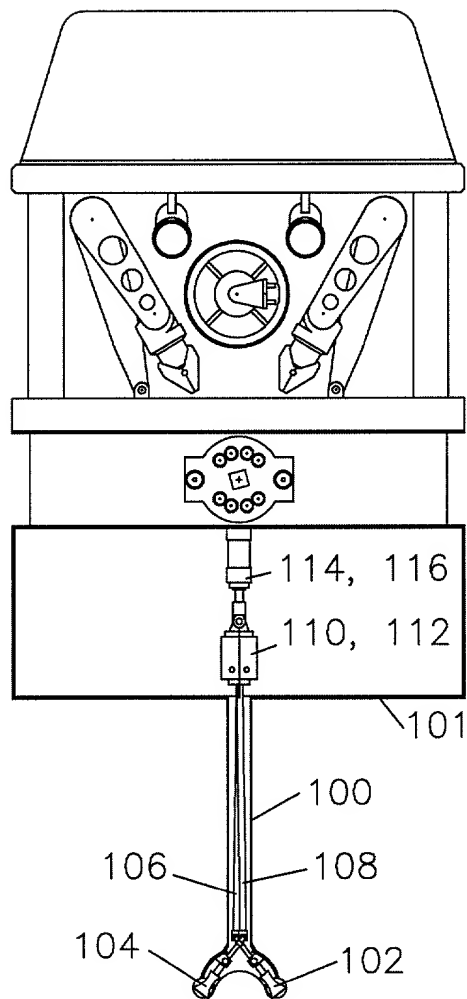


FIG. 6

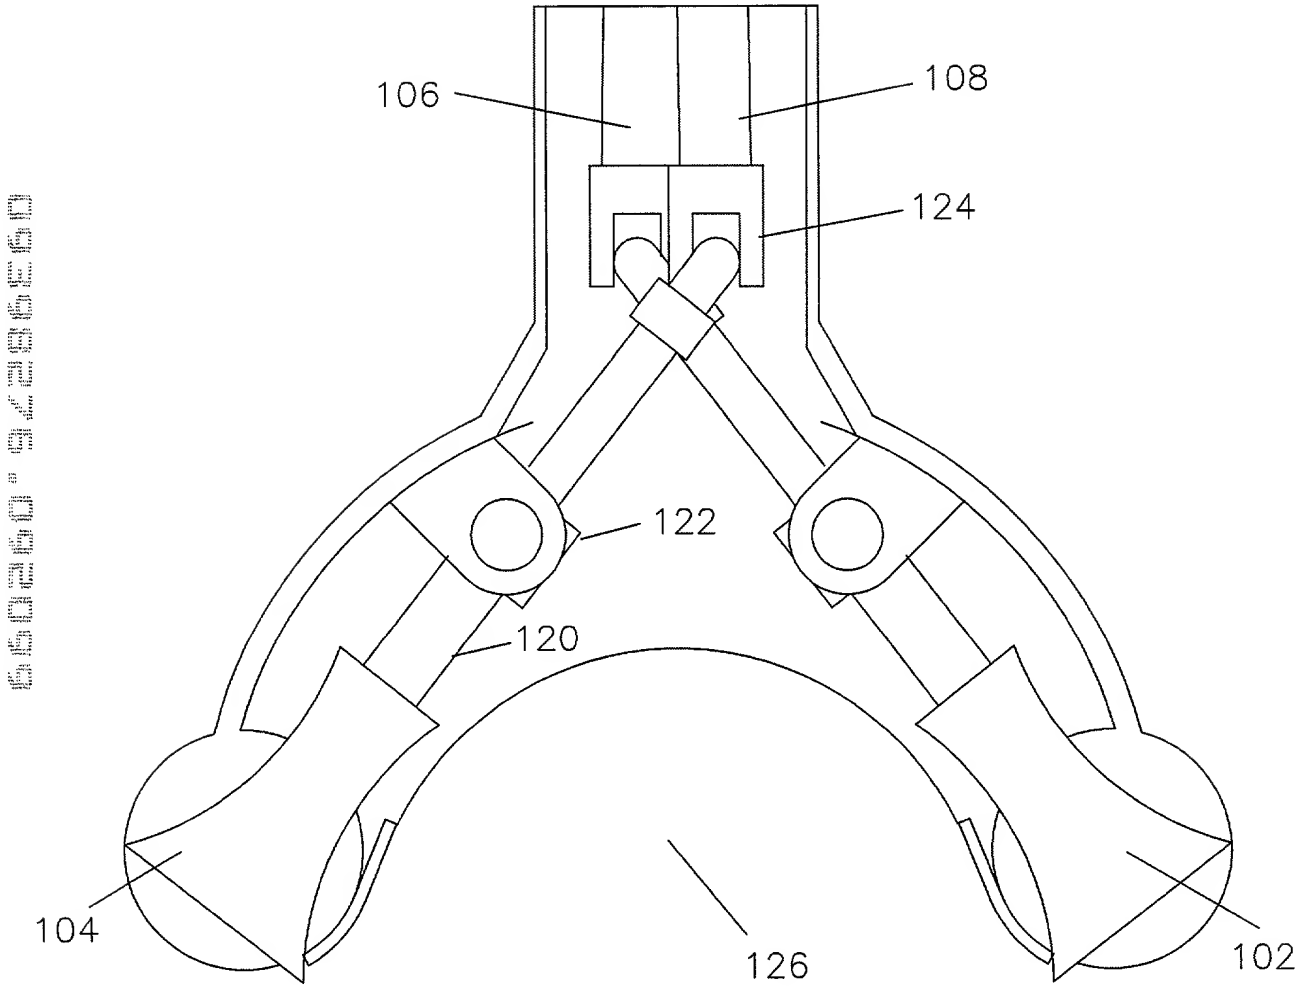


FIG. 7

650260" 9/23/85

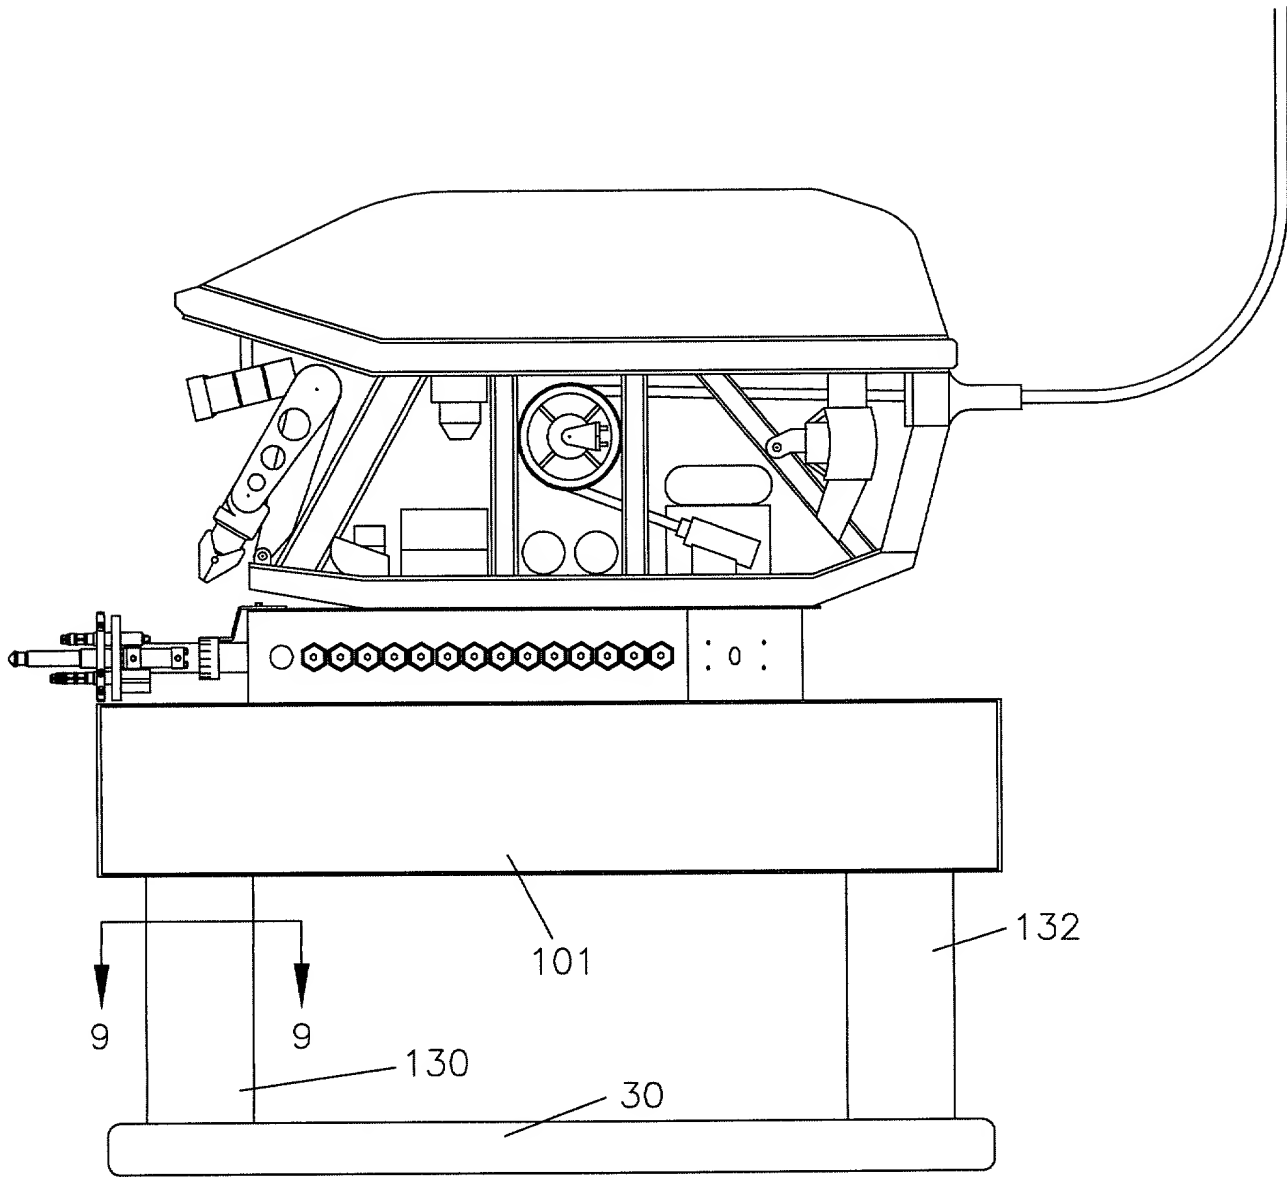


FIG. 8

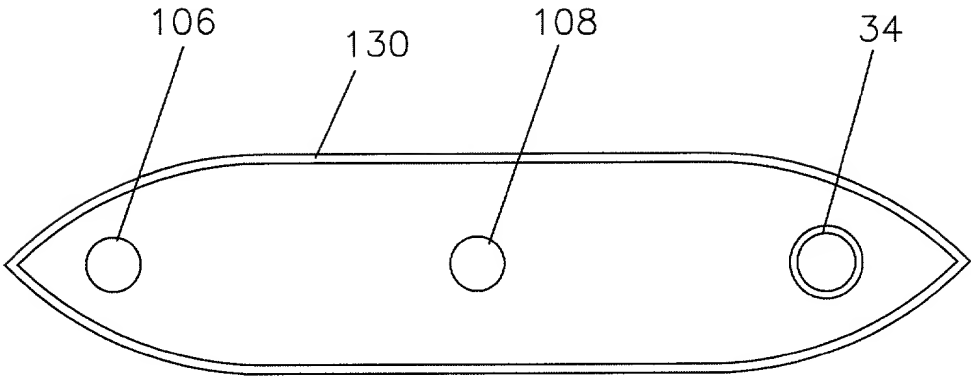


FIG. 9

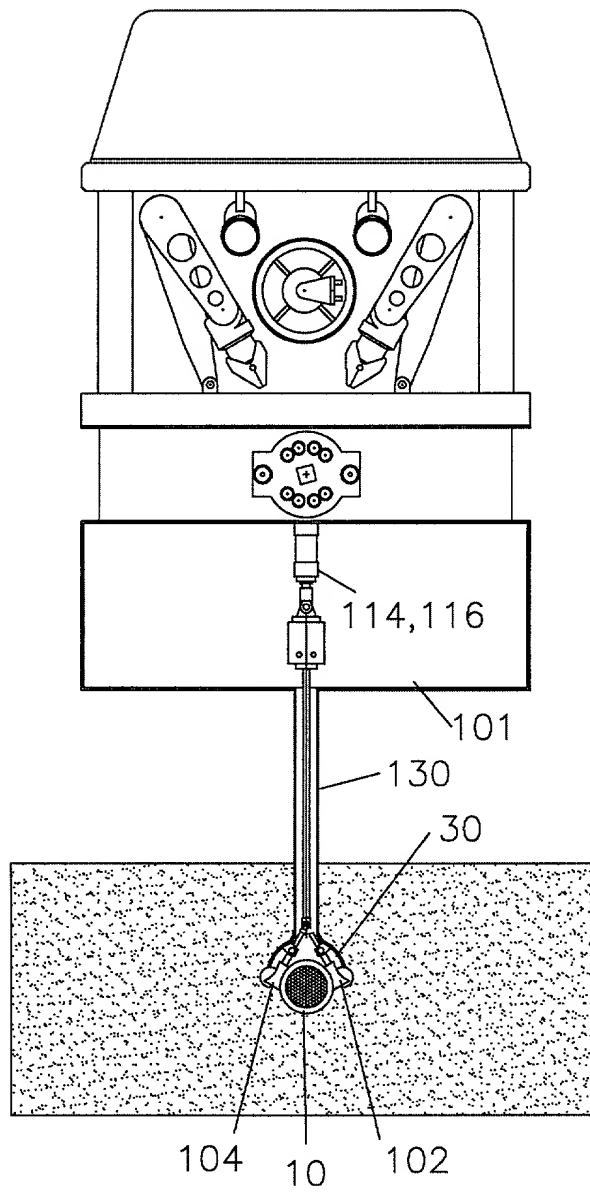


FIG. 10

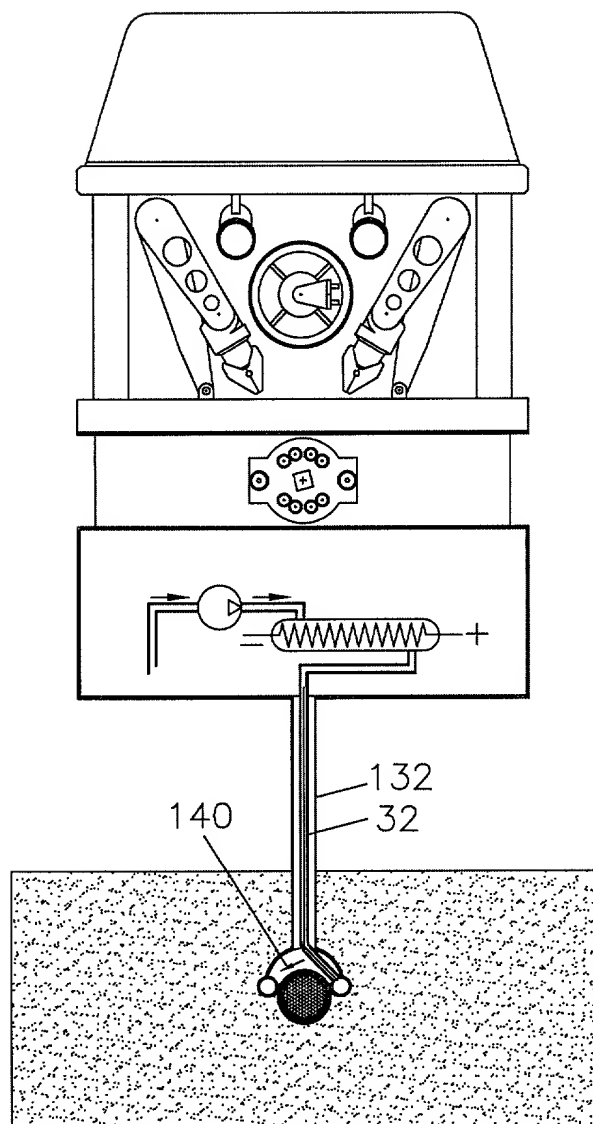


FIG. 11

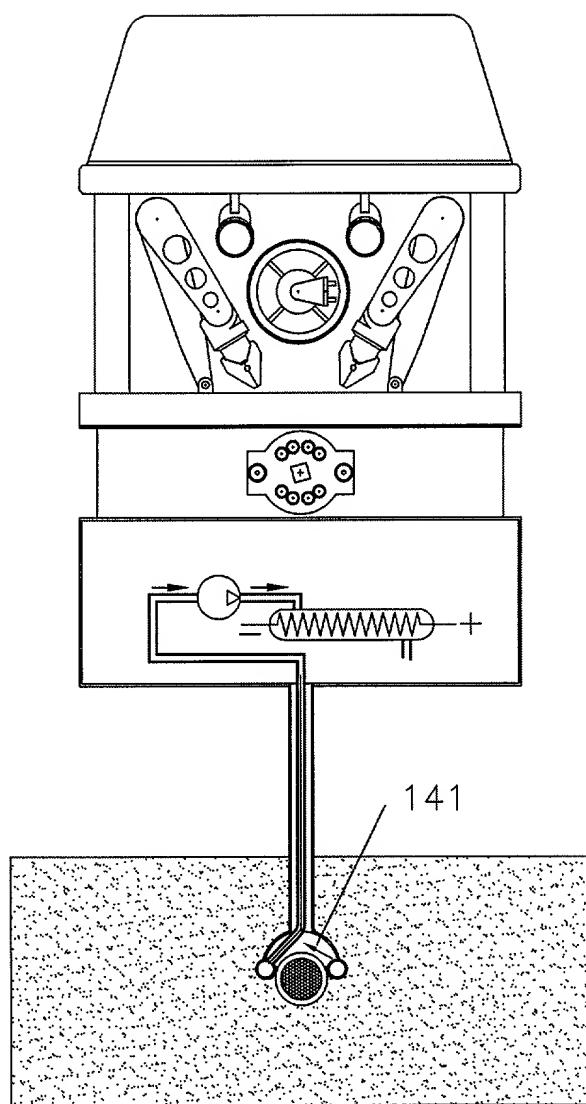


FIG. 12



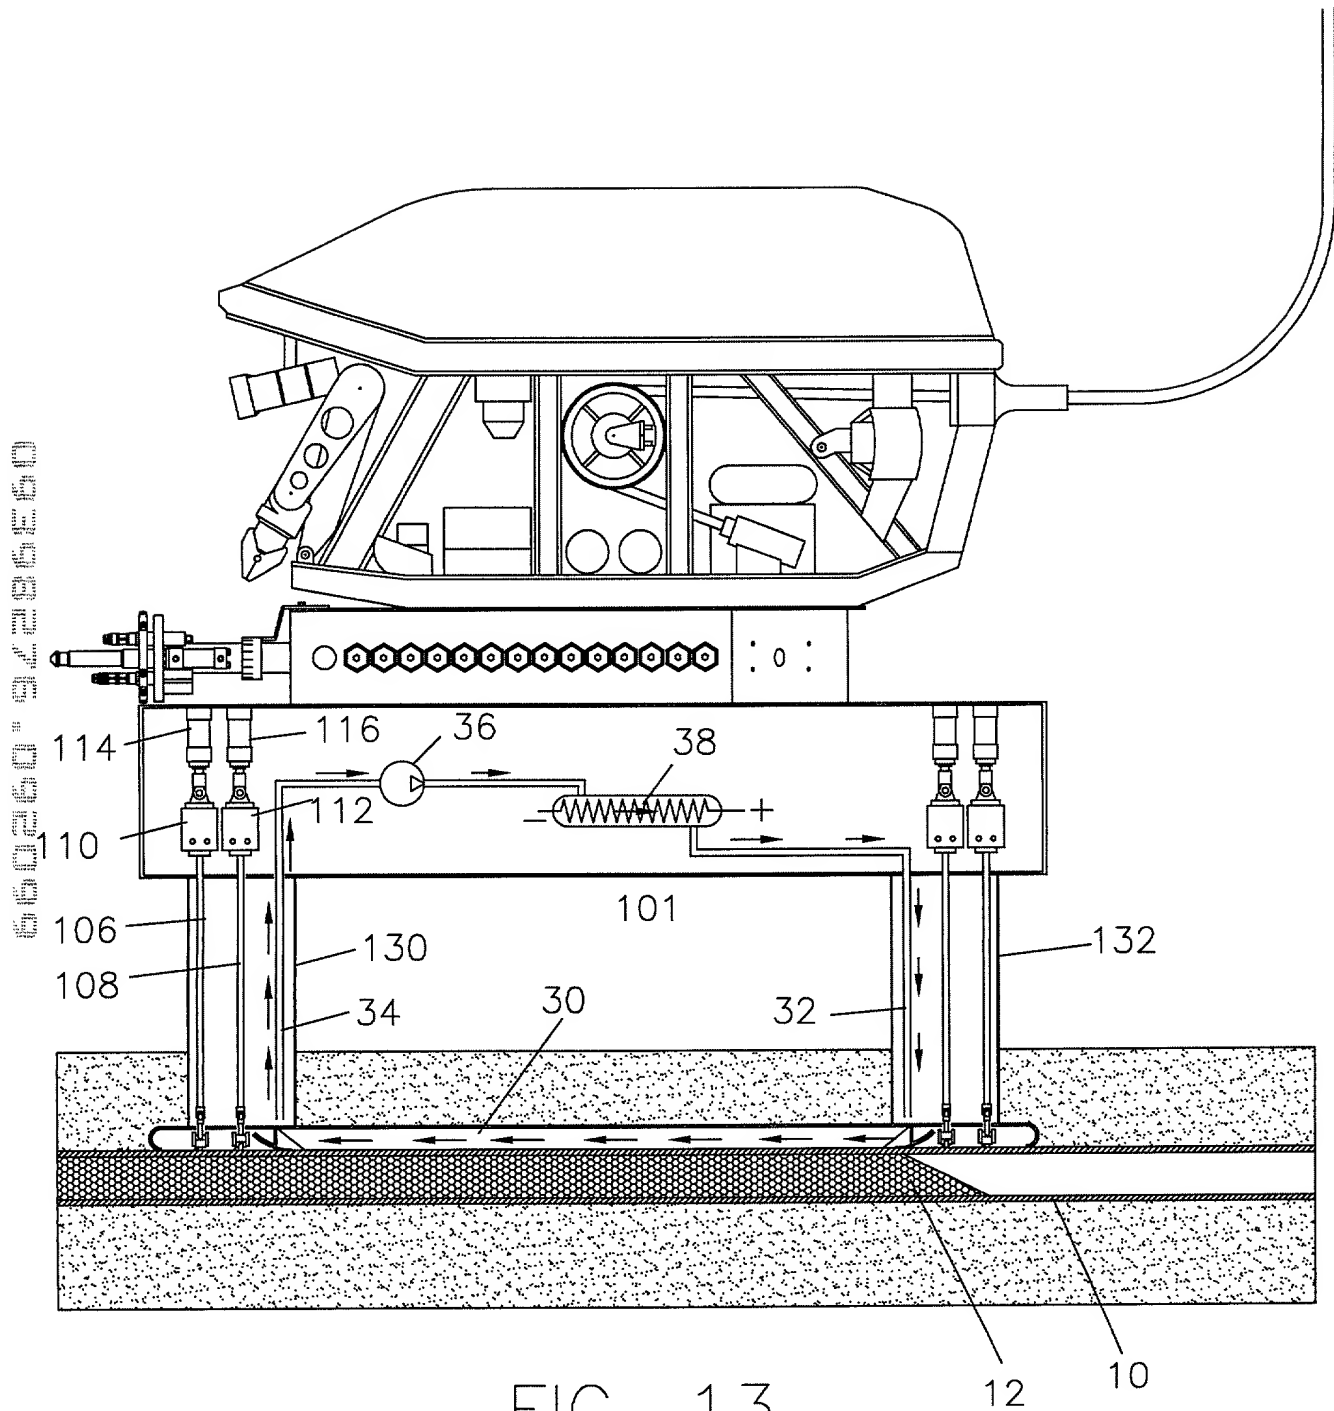


FIG. 13

## DECLARATION FOR PATENT APPLICATION

I, Benton F. Baugh, hereby declare:

I reside in the place set forth below, have post office address as set forth below and am a citizen of the United States of America.


I believe I am the original and first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **SUBSEA PIPELINE BLOCKAGE REMEDIATION METHOD**, the specification of which is attached hereto.


I hereby state that I have reviewed and understand the contents of the above identified application, including the claims, as amended by any amendment filed heretofore.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, CFR section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, section 119 of any foreign application for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed: NONE.

I hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

  
Benton F. Baugh  
a resident of Harris County, Texas  
having an address at  
14626 Oak Bend, Houston, Texas 77079-6441

  
Date

660260 9/22/99